





Concealed Parts CFP55

Wall Mounted Mini Thermostatic Shower Valve with 2 Way Flow Control, 1/2"


Product Image

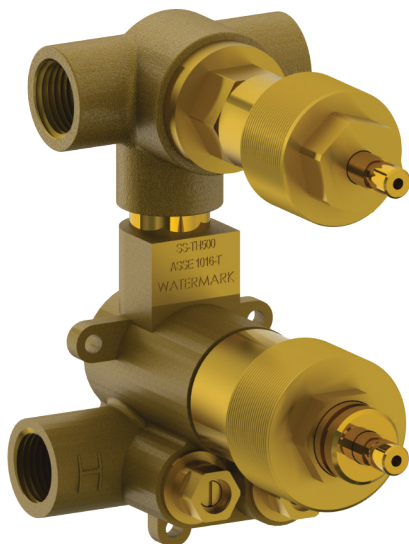

Flow Rate

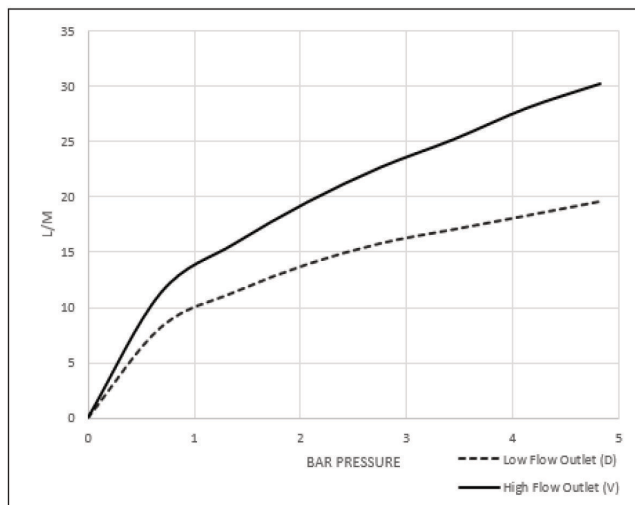

Technical Drawing

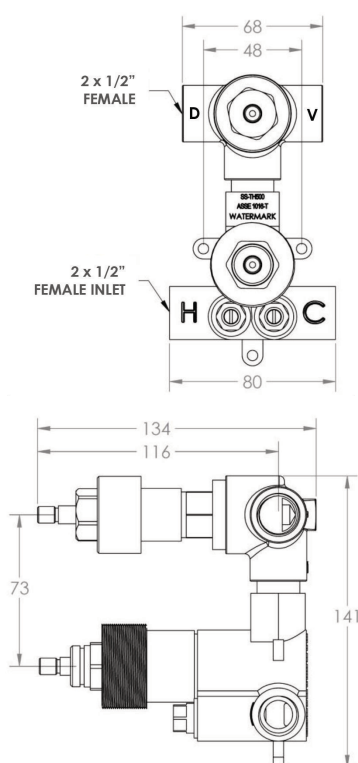

Additional Components

N/A

Product Description

- ◆ Flow Rate at 3 Bar Pressure: 28 litres per minute
- ◆ Connection Size: 1/2"
- ◆ Connection Type: 4 x Female

Product Care

- ◆ Our finishes can be delicate and require both drying after use as well as careful & regular cleaning routines.
- ◆ Water pH should be balanced between 6.5 - 8.5 and should be free of minerals.
- ◆ Normal cleaning should only be done with mild liquid soap in warm water, applied with a microfibre cloth
- ◆ Mineral buildup can be removed with lemon juice in water, applied with a microfibre cloth and then rinsed
- ◆ Occasional application of car body wax will help reduce mineral based standing water marks
- ◆ Our "Live" finishes are designed to tarnish.

Certification

