




Highline HIL52

Wall Mounted Mini Thermostatic Shower Valve with 2 Dials: Lever Handle

Product Image



Technical Drawing

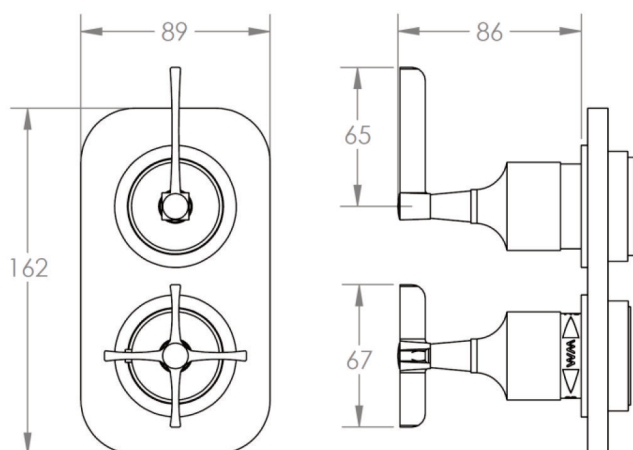

Flow Rate

High Low Outlet: 24 litres per minute at 3 bar pressure

Low Flow Outlet: 16 litres per minute at 3 bar pressure

Product Description

Lower dial controls temperature

- ◆ Factory set maximum temperature: 65°
- ◆ Safety stop button set at 38°
- ◆ Includes 2 x built in check (non-return) valves

Upper dial controls flow rate to 1 or 2 outlets

- ◆ 1 Outlet model turns 1/4 turn clockwise only
- ◆ 2 Outlet model turns 1/4 turn either side of centre
- ◆ 2 Outlet model supplies high flow on 1 mode only

- ◆ Select separate concealed part to control function
- ◆ Ensure balanced feed pressures between 1-5 bar

Finishes Available

PC Polished Chrome

BN Brushed Nickel

GM Gun Metal

NB Natural Brass

PN Polished Nickel

MB Matt Black

LB Luxe Brass

AB Aged Brass

AN Aged Nickel

BM Black Mirror

SB Satin Brass

HB Heritage Brass

OR Oil Rubbed Bronze

PT Pewter

RB Rustica Brass

TB Tarnished Brass

VB Vintage Brass

VC Vintage Copper

BG Brushed 24k Gold

CH Charcoal

MT Custom Matt Lacquer

PG Polished 24k Gold

CP Polished Champagne

BC Brushed Champagne

Additional Components

Requires Concealed Part: CFP55

Certification



Product Care

- ◆ Our finishes can be delicate and require both drying after use as well as careful & regular cleaning routines.
- ◆ Water pH should be balanced between 6.5 - 8.5 and should be free of minerals.
- ◆ Normal cleaning should only be done with mild liquid soap in warm water, applied with a microfibre cloth
- ◆ Mineral buildup can be removed with lemon juice in water, applied with a microfibre cloth and then rinsed
- ◆ Occasional application of car body wax will help reduce mineral based standing water marks
- ◆ Our "Live" finishes are designed to tarnish.